
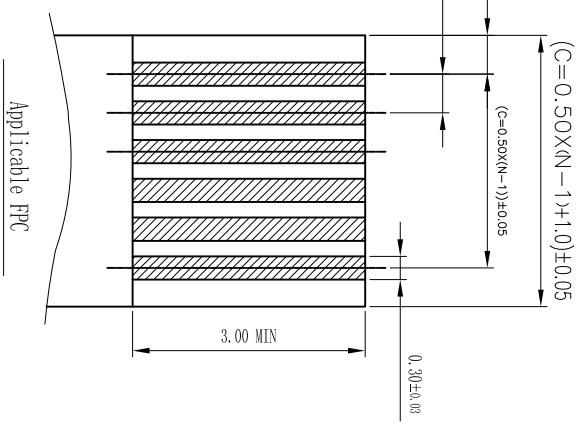
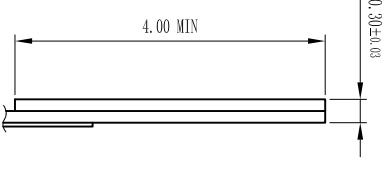
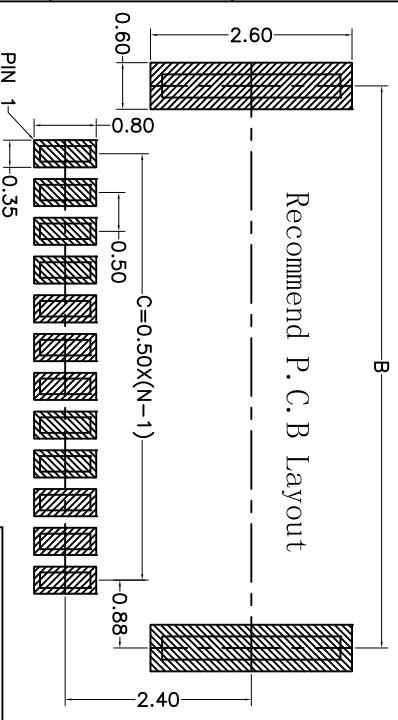
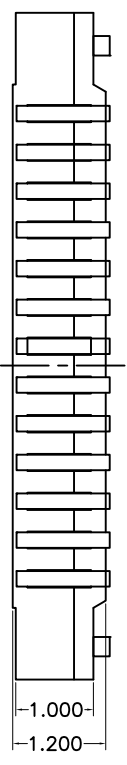
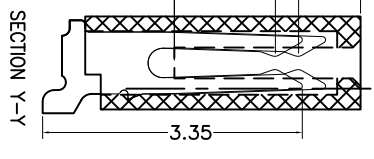
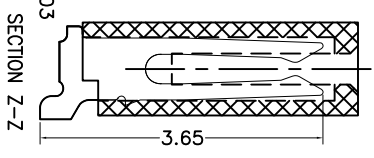
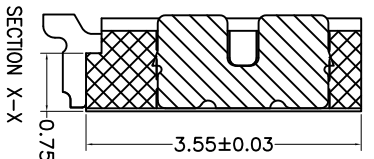
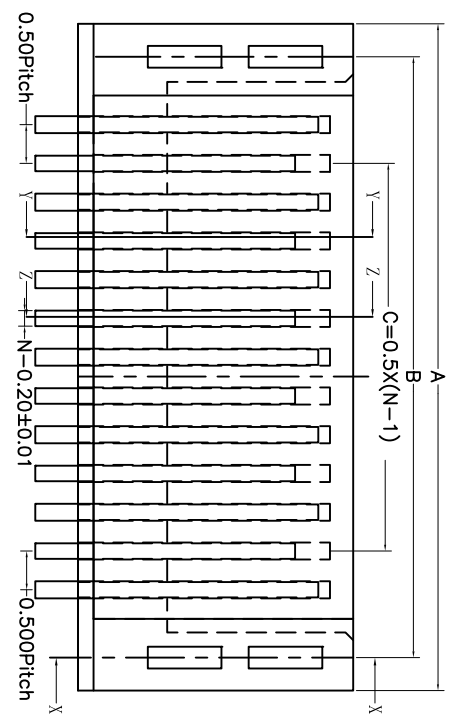


REV.	ECR NO.	DATE	SIGN	DESCRIPTION
A		2014.12.14		NEW DWG

1 RHOS

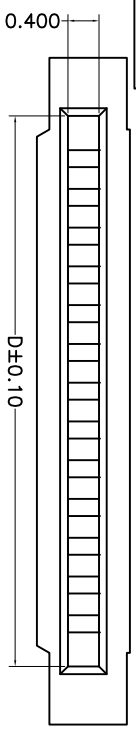

PORT NO	Dimension		
	A	B	D
04P	4.10	3.25	2.60
05P	4.60	3.75	3.10
06P	5.10	4.25	3.60
07P	5.60	4.75	4.10
08P	6.10	5.25	4.60
09P	6.60	5.75	5.10
10P	7.10	6.25	5.60
11P	7.60	6.75	6.10
12P	8.10	7.25	6.60
13P	8.60	7.75	7.10
14P	9.10	8.25	7.60
15P	9.60	8.75	8.10
16P	10.10	9.25	8.60
17P	10.60	9.75	9.10
18P	11.10	10.25	9.60
19P	11.60	10.75	10.10
20P	12.10	11.25	10.60
21P	12.60	11.75	11.10
22P	13.10	12.25	11.60

- Material
  - 1.1: Housing: PA46 UL94-V0 Color:Nature.
  - 1.2: Contact: CS191-H T=0.20±0.01.
  - 1.3: LEG: C2680-H T=0.25±0.01.
- Plating
  - 2.1: Contact: Gold flash over Nickel.
  - 2.2: LEG:
- Rating: TIN PLATED ON NICKEL OVERALL.
  - 3.1: Operating Voltage: 50V AC/DC.
  - 3.2: Current Rating: 0.5A AC/DC.
  - 3.3: Operating Temperature: -40°C~+80°C.
  - 3.4: Made of temperature:255±5°C

TOLERANCE UNLESS SPECIFIED		DATE:4/15'11	DAR.BY:
LINEAR	ANGLE	SCALE: 1:1	CHK.BY:
.X ±0.35	.X' XX	UNIT: mm	APP.BY:
.XX ±0.15	.X' ±2°		
.XXX ±0.05	.XX' XX		

MATERIAL: ---	FINISH: ---
PART NO: ---	



TITLE: 0.5-E-nPWB H1.2  
DWG NO. FPC0511-xxRL-TAx

