
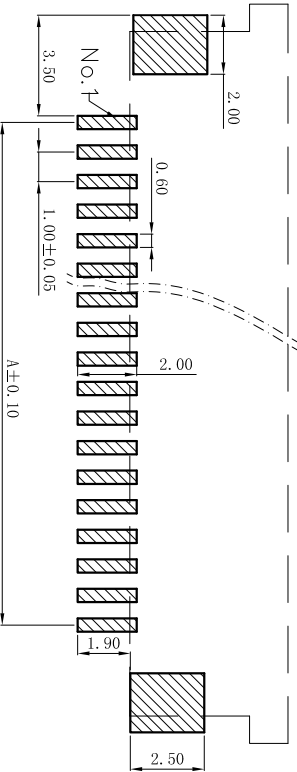
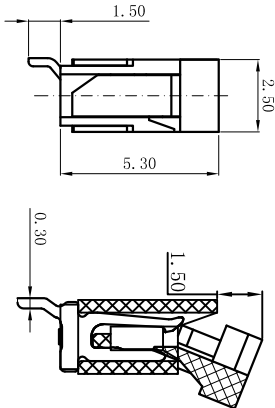
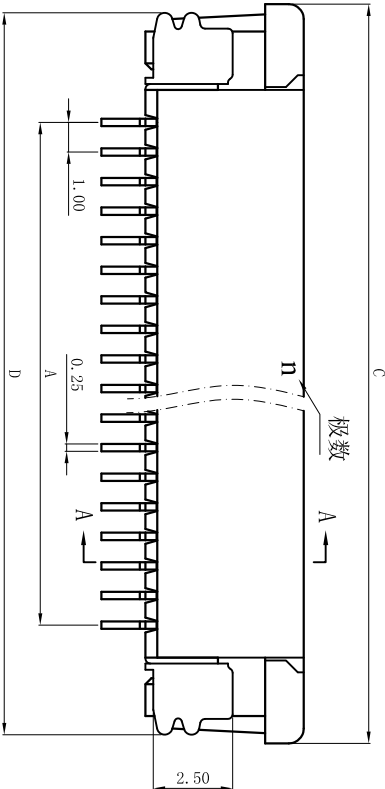


PITCH 1.0mm FPC CONNECTOR SMT TYPE

性能:

额定电流: 0.5A
额定电压: 50V
耐电压: 500V
接触电阻: $\leq 20m\Omega$
绝缘电阻: $800M\Omega$
工作温度: -20℃~+85℃

塑件 (材质) : LCP, UL94V-0
锁扣 (材质) : LCP, UL94V-0
插簧 (材质) : 磷青铜, 镀锡/镀金
焊片 (材质) : 磷青铜, 镀锡/镀金

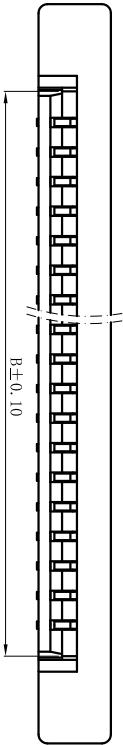

印制电路板 (PCB)

适用扁平电缆

孔位	A	B	C	D
4	3.00	5.15	11.10	10.20
5	4.00	6.15	12.10	11.20
6	5.00	7.15	13.10	12.20
7	6.00	8.15	14.10	13.20
8	7.00	9.15	15.10	14.20
9	8.00	10.15	16.10	15.20
10	9.00	11.15	17.10	16.20
11	10.00	12.15	18.10	17.20
12	11.00	13.15	19.10	18.20
13	12.00	14.15	20.10	19.20
14	13.00	15.15	21.10	20.20
15	14.00	16.15	22.10	21.20
16	15.00	17.15	23.10	22.20
17	16.00	18.15	24.10	23.20
18	17.00	19.15	25.10	24.20
19	18.00	20.15	26.10	25.20
20	19.00	21.15	27.10	26.20
21	20.00	22.15	28.10	27.20
22	21.00	23.15	29.10	28.20
23	22.00	24.15	30.10	29.20
24	23.00	25.15	31.10	30.20
25	24.00	26.15	32.10	31.20
26	25.00	27.15	33.10	32.20
27	26.00	28.15	34.10	33.20
28	27.00	29.15	35.10	34.20
29	28.00	30.15	36.10	35.20
30	29.00	31.15	37.10	36.20
31	30.00	32.15	38.10	37.20
32	31.00	33.15	39.10	38.20
33	32.00	34.15	40.10	39.20
34	33.00	35.15	41.10	40.20
35	34.00	36.15	42.10	41.20
36	35.00	37.15	43.10	42.20

深圳市鸿锐盛电子有限公司				TITLE:		1. 0mm FPC (E型) 半包下接(H=2.5)	
NAME (INTENDED USE) 1. 0mm FPC (E型) 半包下接(H=2.5)				PART NO. (INTENDED USE)		APPD:	
				1. 0K-FY-HPB		CHKD:	
				DR:		Q'TY	
				UNITS		mm	
K. ± 0.3		K. ° ± 5°		X. ± 0.25		X. ° ± 2°	
.XX ± 0.20		.XX ° ± 1°		.XXX ± 0.10		.XXX ° ± 0.5°	
FINISH							
DWG NO. :		SCALE		SHEET		REV.	
1/1		1/1		A			

深圳市鸿锐盛电子有限公司