

1.0mm PITCH FPC CONNECTORS

性能:

额定电流: 0.5A

额定电压: 50V

耐电压: 500V

接觸电阻： $\leq 20\text{m}\Omega$

边缘电阻: $800\text{M}\Omega$








工作温度: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$

塑件(材质): LCP, UL94V-0

锁扣(材质): LCP, U94V-0

插簧(材质): 磷青铜, 镀锡

插簧(材质): 磷青铜, 镀锡/镀金

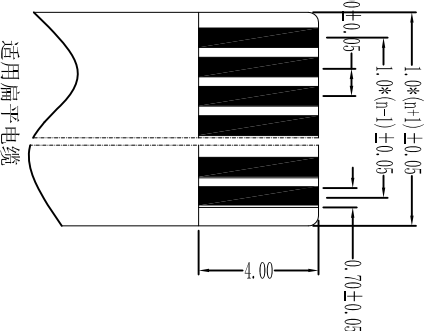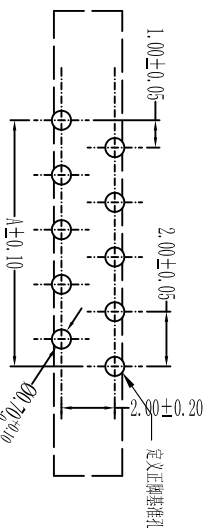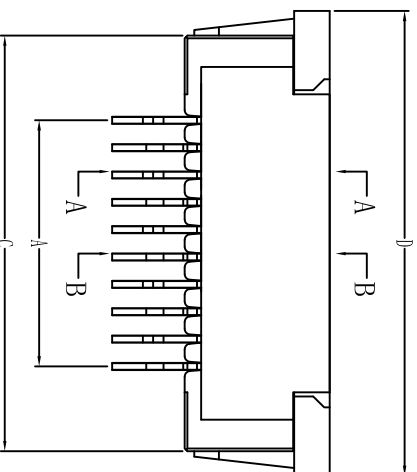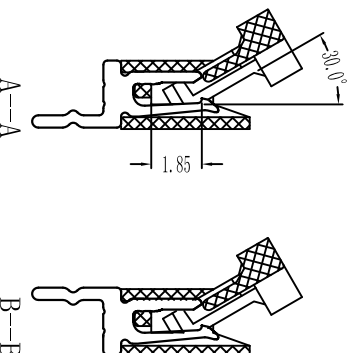

孔位	A	B	C	D
6	5	7.15	11.2	13.1
7	6	8.15	12.2	14.1
8	7	9.15	13.2	15.1
10	9	11.15	15.2	17.1
12	11	13.15	17.2	19.1
14	13	15.15	19.2	21.1
15	14	16.15	20.2	22.1
16	15	17.15	21.2	23.1
18	17	19.15	23.2	25.1
20	19	21.15	25.2	27.1
22	21	23.15	27.2	29.1
24	23	25.15	29.2	31.1
25	24	26.15	30.2	32.1
26	25	27.15	31.2	33.1
28	27	29.15	33.2	35.1
29	28	30.15	34.2	36.1
30	29	31.15	35.2	37.1

X. $\pm$ 0.3		UNITS	NAME (INTENDED USE)		深圳市鸿锐盛电子有限公司			
X.° $\pm$ 5°		mm	1. 0mm PFC (H型) 直插式(正脚)					
.X $\pm$ 0.25		MAT'L	PART NO. (INTENDED USE)					
.XX $\pm$ 0.20		材料	1. 0K-10-1P					
.XXX $\pm$ 0.10		FINISH	APPLD		TITLE:			
		硬度			1. 0mm PFC (H型) 直插式(正脚)			
		Q' TY	DRG NO.:					
		PCS	CHKD:					
		DRG			SCALE			
					1/1			
					SHEET			
					1/1			