
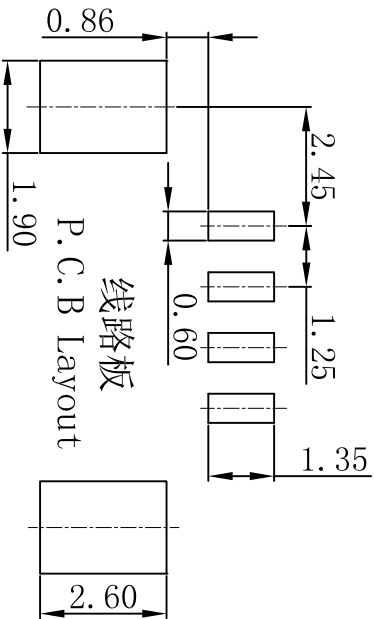
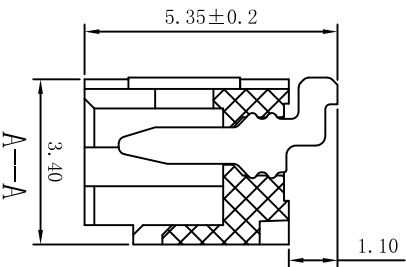
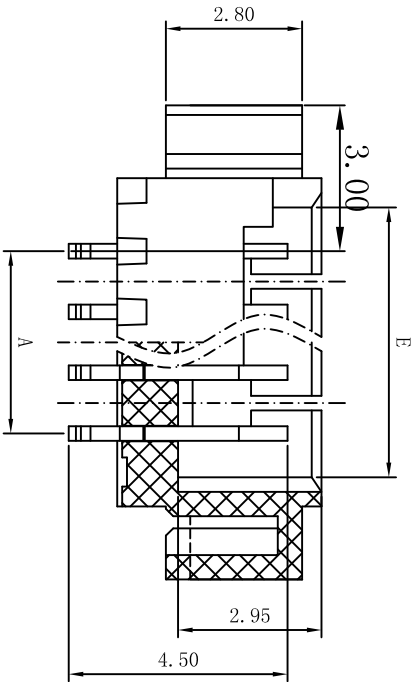
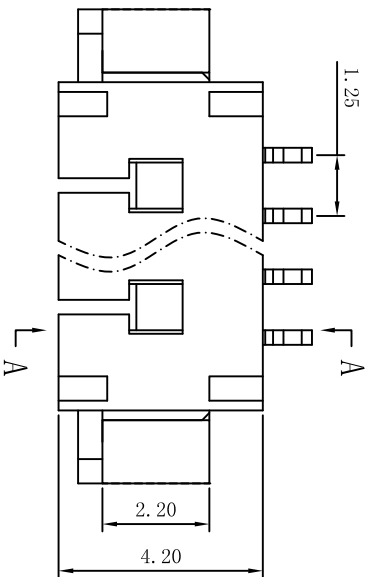


PITCH 1.25mm BAR CONNECTORS

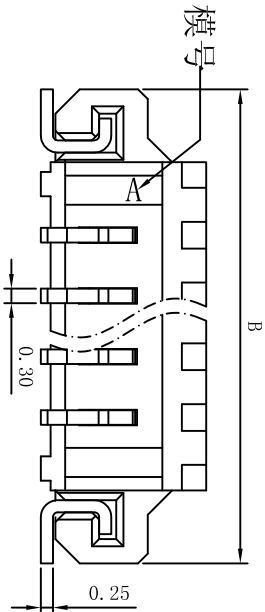

性能:

额定电流: 1A
额定电压: 100V
耐电压: 500V
接触电阻: ≤20mΩ
绝缘电阻: 500MΩ
工作温度: -20℃~+85℃
塑件 (材质): LCP, UL94V-0
插簧 (材质): 磷青铜, 镀锡/镀金
焊片 (材质): 磷青铜, 镀锡/镀金

孔位	A	B	E
2	1.25	7.25	3.05
3	2.50	8.50	4.30
4	3.75	9.75	5.55
5	5.00	11.00	6.80
6	6.25	12.25	8.05
7	7.50	13.50	9.30
8	8.75	14.75	10.55
9	10.00	16.00	11.80
10	11.25	17.25	13.05
11	12.50	18.50	14.30
12	13.75	19.75	15.55
13	15.00	21.00	16.80
14	16.25	22.25	18.05
15	17.50	23.50	19.30
16	18.75	24.75	20.55

NAME (INTENDED USE)			UNITS mm	
1.25mm (D型) 条形连接器贴板式			MATERIAL	
X ± 0.3	X° ± 5°			
.X ± 0.25	.X° ± 2°			
.XX ± 0.20	.XX° ± 1°			
.XXX ± 0.10	.XXX° ± 0.5°		FINISH	
PART NO. (INTENDED USE)			Q'TY	
1.25-D-mPB				
APDR:				
CHKD:				
DR:				
TITLE:			SCALE	
1.25mm (D型) 条形连接器贴板式			1/1	
DWG NO.:			SHEET	
			1/1	
			REV.	
			A	

深圳市鸿锐盛电子有限公司