
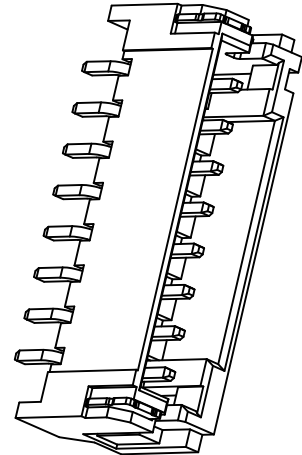

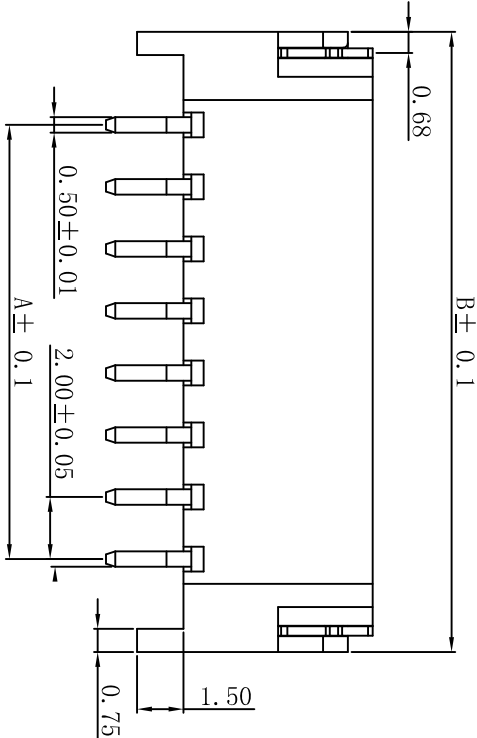
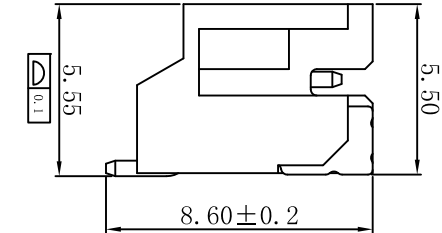


REV.	ECN.NO	MODIFY CONTENT

性能:


额定电流: 1A
额定电压: 100V
耐电压: 500V
接触电阻: $\leq 20m\Omega$
绝缘电阻: 500M Ω
工作温度: -20℃~+85℃

塑件 (材质) : LCP, UL94V-0
插簧 (材质) : 黄铜, 镀锡
焊片 (材质) : 磷青铜, 镀锡

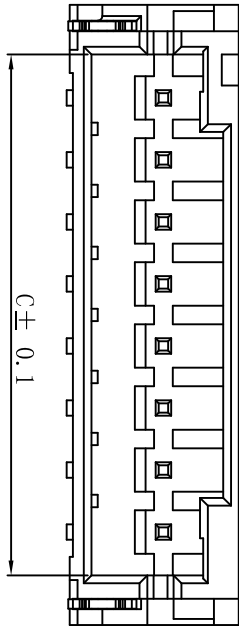

孔位	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80

PCB LAYOUT

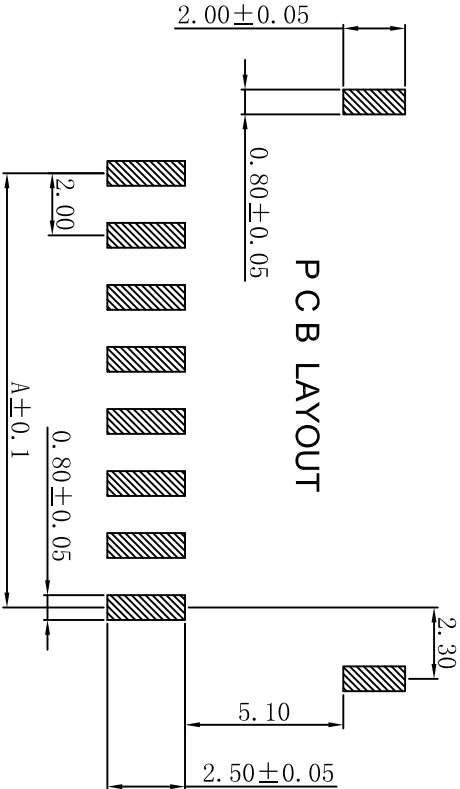

X. ± 0.20	X. ± 5°	UNITS mm
.X ± 0.15	.X ± 2°	MAT'L
.XX ± 0.08	.XX ± 1°	FINISH
.XXX ± 0.05	.XXX ± 0.5°	Q'TY

NAME (INTENDED USE)
2.0 卧贴/wafer

TITLE:
2.0 卧贴/wafer

PART NO. (INTENDED USE)
2.0-A-nPWB

DWG NO.:
2.0 卧贴/wafer

CHKD:
DR: huang sheng2013-02-02

SCALE	SHEET	REV.
1:1	1/1	B

E

D

C

B

A

E

D

C

B

A