
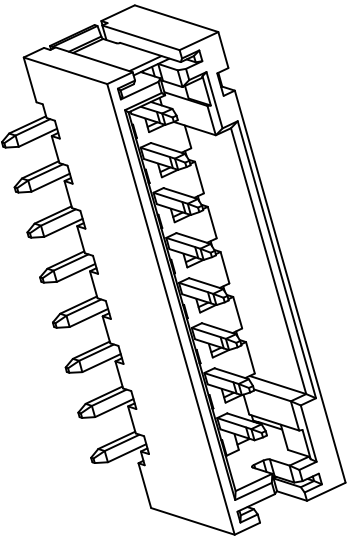
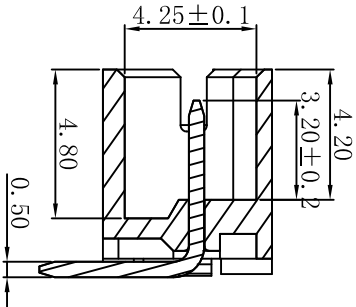
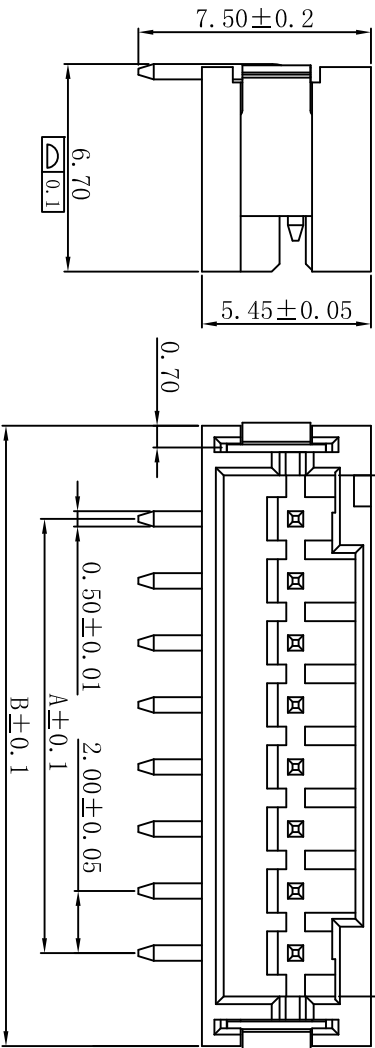


REV.	ECN.NO	MODIFY CONTENT


性能:

额定电流: 1A
额定电压: 100V
耐电压: 500V
接触电阻: $\leq 20m\Omega$
绝缘电阻: 500M Ω
工作温度: -20℃~+85℃

塑件 (材质) : LCP, UL94V-0
插簧 (材质) : 黄铜, 镀锡
焊片 (材质) : 磷青铜, 镀锡

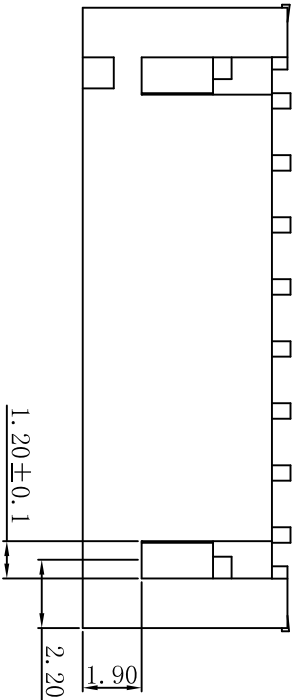

孔位	A	B	C
2	2.00	8.00	4.80
3	4.00	10.00	6.80
4	6.00	12.00	8.80
5	8.00	14.00	10.80
6	10.00	16.00	12.80
7	12.00	18.00	14.80
8	14.00	20.00	16.80
9	16.00	22.00	18.80
10	18.00	24.00	20.80
11	20.00	26.00	22.80
12	22.00	28.00	24.80

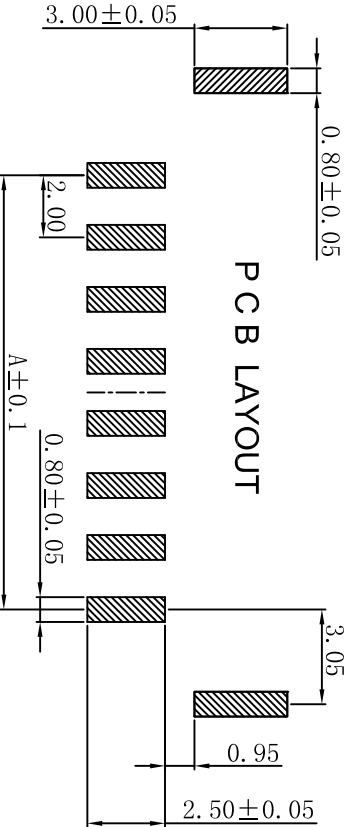

PCB LAYOUT

X.± 0.20	X ² ± 5°	UNITS	mm	NAME(INTENDED USE)	2. 0 立贴/wafer	深圳市鸿锐盛电子有限公司
.X± 0.15	.X ² ± 2°	MAT'L		PART NO.(INTENDED USE)	2.0-B-nPB	
.XX± 0.08	.XX ² ± 1°	FINISH		APPD:		
.XXX± 0.05	.XXX ² ± 0.5°	Q'TY		CHKD:		
DR: huang sheng2013-02-02				SCALE	SHEET	REV.