

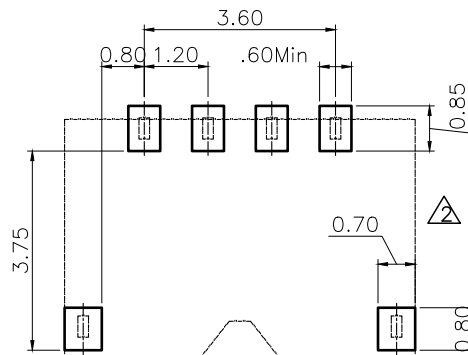
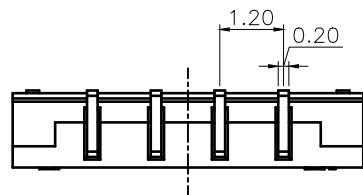


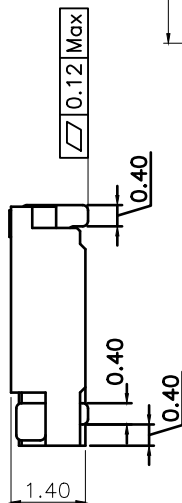

Recommended P.C.B. Layout
Total tolerance:±0.05mm

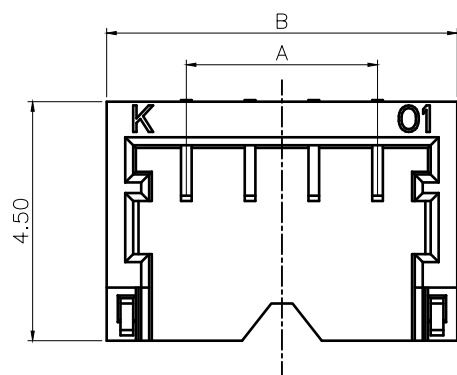

Ordering Code:

C1200 RS *** 20 P9 2 0
① ② ③ ④

- ① Series NO.
② NO.of Circuit: 002=2P
③ Insulator Material: P9=PA9T,LP=LCP
④ Packing Type: 2=Reel&Tape

◆SPECIFICATIONS

- Current rating: 1.5A AC, DC
- Voltage rating: 50V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: PA9T UL 94V-0 Black

Contact: Phosphor bronze

Fitting Nail: Brass

Plating:

Contact: Gold Flash

Fitting Nail: Matte tin plated

Circuits: 2~8



Suitable: 1200 series Housing

PIN.	Dimension		
	A	B	C
2P	1.20	4.30	2.64
3P	2.40	5.50	3.84
4P	3.60	6.70	5.04
5P	4.80	7.90	6.24
6P	6.00	9.10	7.44
7P	7.20	10.30	8.64
8P	8.40	11.50	9.84

④				GENERAL TOLERANCE		UNIT: mm		DATE		TITLE: MX 1.20 SMT Wafer		
③	闵昕皓	2018.02.05	增加8P	.X±0.30	X°±1°	DRAWN:		2017.02.10				
②	闵昕皓	2017.02.10	更正"P.C.B. LAYOUT"	.XX±0.20	.X°±	CHECKED:				PROJECT PART NO. C1200RS***20P920		
①	王钰徽	2015.07.07	按实物修改B号尺寸,系列PIN尺寸加0.10	.XXX±0.10	.XX°±	APPROVED:						
LTR	NAME	DATE	VERISION RECORD							VER.	SCALE:	N/A
										A1	SHEET:	1/1

深圳市鸿锐盛电子有限公司

DRAWING NO. 1200WHS01-2-S

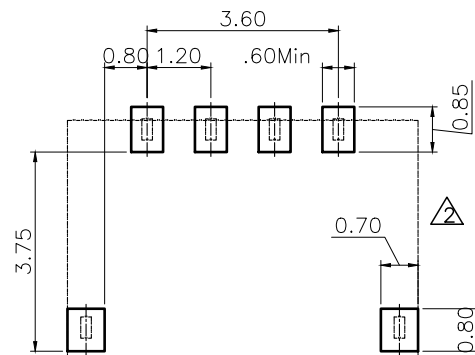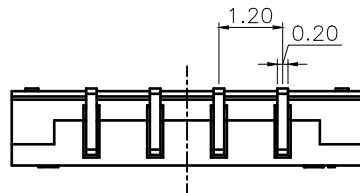

Recommended P.C.B. Layout
Total tolerance:±0.05mm

◆SPECIFICATIONS

- Current rating: 1.5A AC, DC
- Voltage rating: 50V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: PA9T/LCP UL 94V-0 Black

Contact: Phosphor bronze

Fitting Nail: Brass

Plating:

Contact: Gold Flash

Fitting Nail: Matte tin plated

Circuits: 2~7




Suitable: 1200 series Housing

Ordering Code:

C1200 RS *** 20 P9 2 1
① ② ③ ④

- ① Series NO.
- ② NO.of Circuit: 002=2P
- ③ Insulator Material: P9=PA9T,LP=LCP
- ④ Packing Type: 2=Reel&Tape

PIN.	Dimension		
	A	B	C
2P	1.20	4.30	2.64
3P	2.40	5.50	3.84
4P	3.60	6.70	5.04
5P	4.80	7.90	6.24
6P	6.00	9.10	7.44
7P	7.20	10.30	8.64
8P	8.40	11.50	9.84

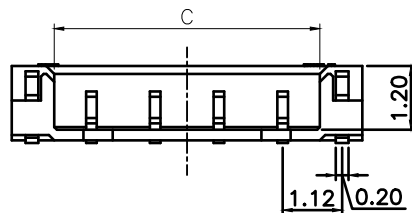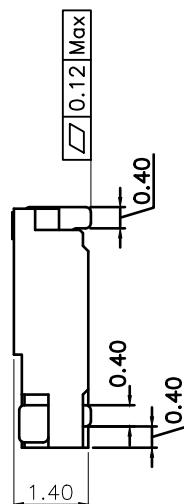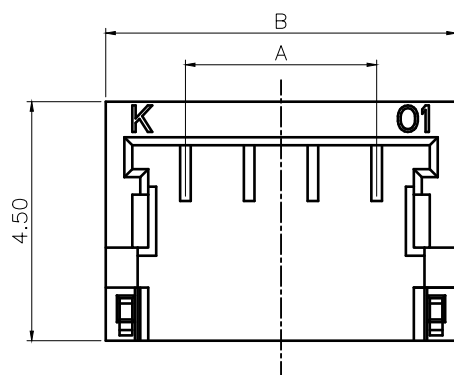

④				GENERAL TOLERANCE		UNIT: mm		DATE		TITLE: MX 1.20 SMT Wafer 无缺口			 东莞市康瑞电子有限公司 DongGuan Konnra Electronics CO.,LTD				
③				.X±0.30	X°±1°	DRAWN:	闵昕皓	2017.02.10									
②	闵昕皓	2017.02.10	更正“P.C.B. LAYOUT”	.XX±0.20	.X°±	CHECKED:				VER.	SCALE:	N/A	PROJECT	PART NO.	C1200RS***20P921		
①	王钰徽	2015.07.07	按实物修改B号尺寸,系列PIN尺寸加0.10														
LTR	NAME	DATE	VERISION RECORD	.XXX±0.10	.XX°±	APPROVED:				A1	SHEET:	1/1		DRAWING NO.	1200WHS02-2-S		
1		2		3		4		5		6		7		8		9	



东莞市康瑞电子有限公司
DongGuan Konnra Electronics CO.,LTD

