
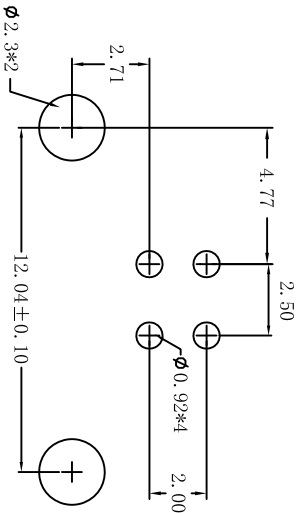
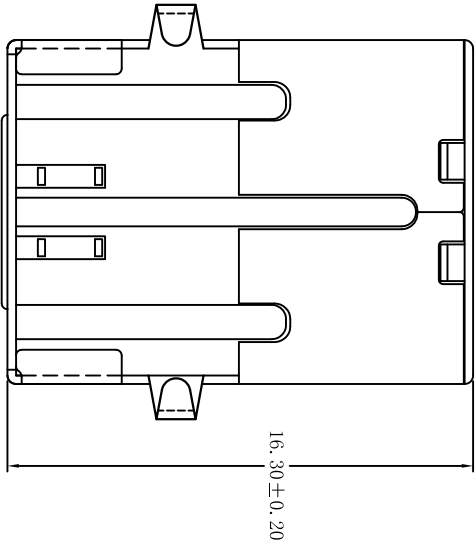
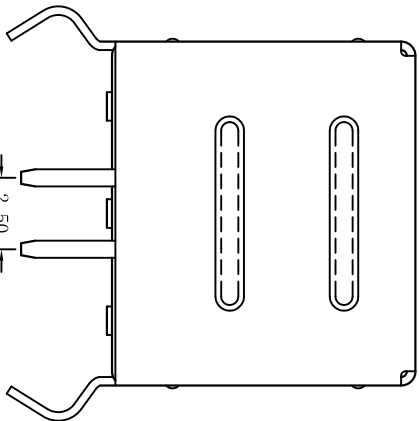
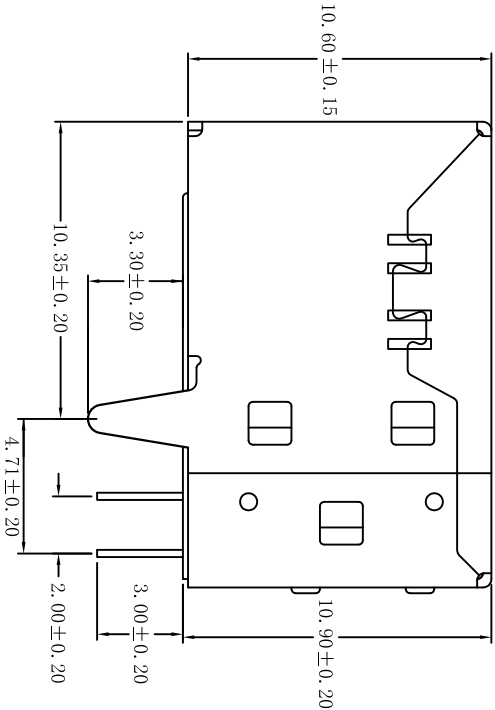


REV.	ECN NO.	DESCRIPTION	DRWN	APPD.	DATE.

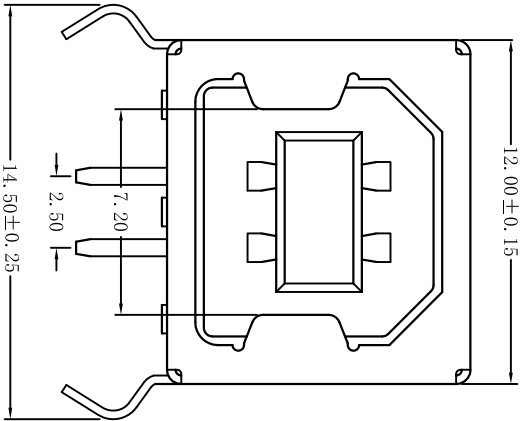

- Specifications:
- Electrical:
- 1. Current Rating: 1.5A/contact terminal
 - 2. Voltage Rating: 30V DC
 - 3. Contact Resistance: 30 milliohms MAX
 - 4. Dielectric Withstanding Voltage: 500 V AC AT Sea Level
 - 5. Insulation Resistance: 1000MΩ ohms MIN
- Mechanical:
- 1. Connector Mate and Umate Force: Mate Force: 3. 73kgf (MAX) Umate Force: 1. 02kgf (MIN)
 - 2. Terminal Retention: 1. 2kgf (MIN)
- Material:
- 1. Housing: High Temperature Thermoplastics, U1 94V-0 PBT White
 - 2. Contact: Copper Alloy C2680
 - 3. Shell: Copper Alloy C2680/SPCC
- Finish:
- 1. Contact: Plated gold in Mating Area: Tin On Solder Tails
 - 2. Shell: Nickel Plating

深圳市鸿锐盛电子有限公司

UNITS MM	SCALE 1:1	TITILE: USB B/F 90° DIP弯脚白胶			
GENERAL TOLERANCE		DR. Aaron	CHK. Aaron	DATE: 2011. 06. 28	P
X. ±0.30			MAT'L: JYJUSB-B01F002Y	PART NO: PUBFB-X23A-XXX	SIZE A4
X.X ±0.20					
X.XX ±0.10					
X.° ±3°					
X.X° ±2°					