


| 版 | B |   |
|---|---|---|
|   | A |   |
| 本 | C | D |

| A   |       |       |
|-----|-------|-------|
| PIN | A     | B     |
| 2   | 10.74 | 2.54  |
| 3   | 13.28 | 5.08  |
| 4   | 15.82 | 7.62  |
| 5   | 18.36 | 10.16 |
| 6   | 20.90 | 12.70 |
| 7   | 23.44 | 15.24 |
| 8   | 25.98 | 17.78 |
| 9   | 28.52 | 20.32 |
| 10  | 31.06 | 22.86 |
| 11  | 33.60 | 25.40 |
| 12  | 36.14 | 27.94 |
| 13  | 38.68 | 30.48 |
| 14  | 41.22 | 33.02 |
| 15  | 43.76 | 35.56 |
| 16  | 46.30 | 38.10 |
| 17  | 48.84 | 40.64 |
| 18  | 51.38 | 43.18 |
| 19  | 53.92 | 45.72 |
| 20  | 56.46 | 48.26 |
| 21  | 59.00 | 50.80 |
| 22  | 61.54 | 53.34 |
| 23  | 64.08 | 55.88 |
| 24  | 66.62 | 58.42 |
| 25  | 69.16 | 60.96 |
| 26  | 71.70 | 63.50 |
| 27  | 74.24 | 66.04 |

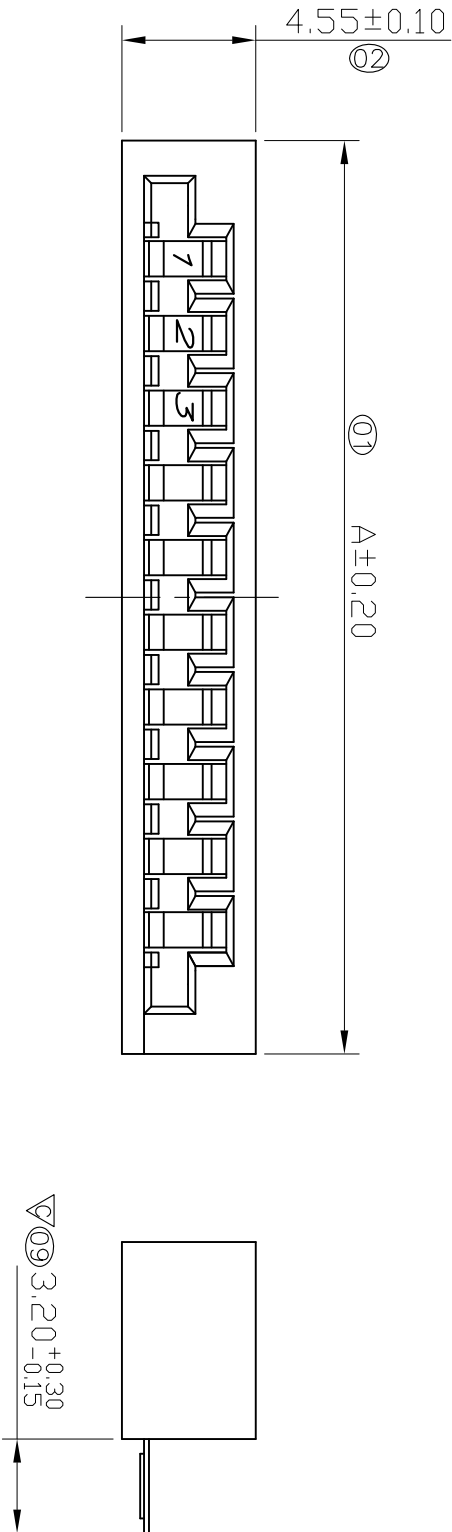


备注:

塑胶: PBT+25%GF (UL 94V-0)  
端子: 磷铜C5191 R-H 镍底  
15u". 表面镀亮锡30u"~50u".

性能:

额定电流: 1A, AC/DC  
额定电压: 200V  
接触阻抗: 30mΩ Max.  
绝缘阻抗: 1000MΩ MIN.  
耐电压值: 500V RMS  
工作温度: -55℃ to +85℃.  
标记⊗为FAI尺寸, 标记▽为重点  
管控及首件检测尺寸

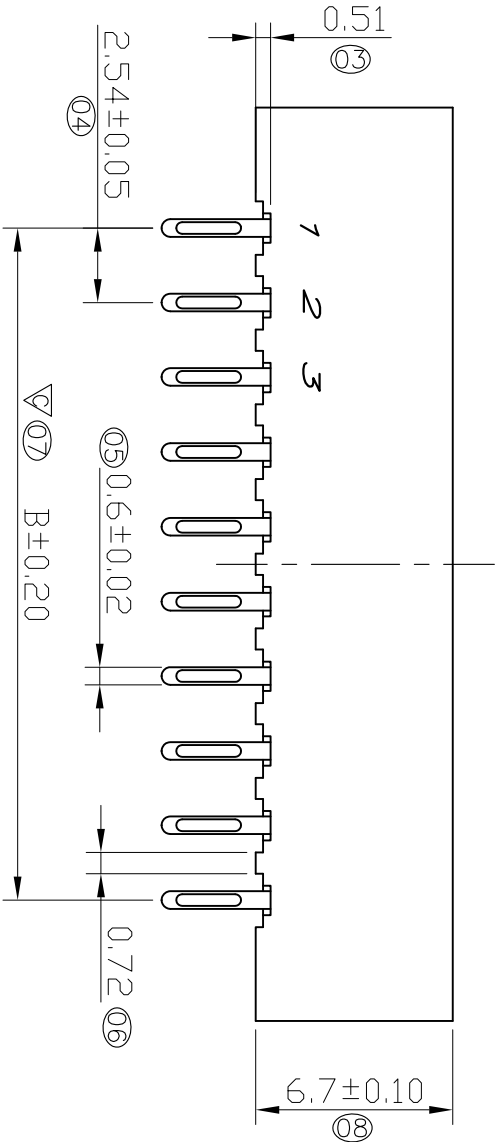

|                                                                                   |           |       |     |         |  |         |            |                                                                                   |   |        |    |          |  |  |  |
|-----------------------------------------------------------------------------------|-----------|-------|-----|---------|--|---------|------------|-----------------------------------------------------------------------------------|---|--------|----|----------|--|--|--|
| TOLERANCE UNLESS SPECIFIED                                                        |           |       |     |         |  |         |            | REV                                                                               | A | DR, BY | 劉敏 | MATERIAL |  |  |  |
| LINEAR                                                                            | 0.0±0.30  | SHEET |     | CHK, BY |  | FINISH  |            |                                                                                   |   |        |    |          |  |  |  |
|                                                                                   | 0.00±0.20 | SCALE | 1:1 | APP, BY |  | DATE    | 2011-01-18 |                                                                                   |   |        |    |          |  |  |  |
| ANGLE                                                                             | ±1°       | UNIT  | MM  |         |  | PART NO | 2.54-A-nP  |                                                                                   |   |        |    |          |  |  |  |
|  |           |       |     |         |  |         |            |  |   |        |    |          |  |  |  |
| TITLE:                                                                            |           |       |     |         |  |         |            | DWG NO.                                                                           |   |        |    |          |  |  |  |
|                                                                                   |           |       |     |         |  |         |            | FPC PITCH=2.54 180°                                                               |   |        |    |          |  |  |  |
| 深圳市鸿锐盛电子有限公司                                                                      |           |       |     |         |  |         |            |                                                                                   |   |        |    |          |  |  |  |