
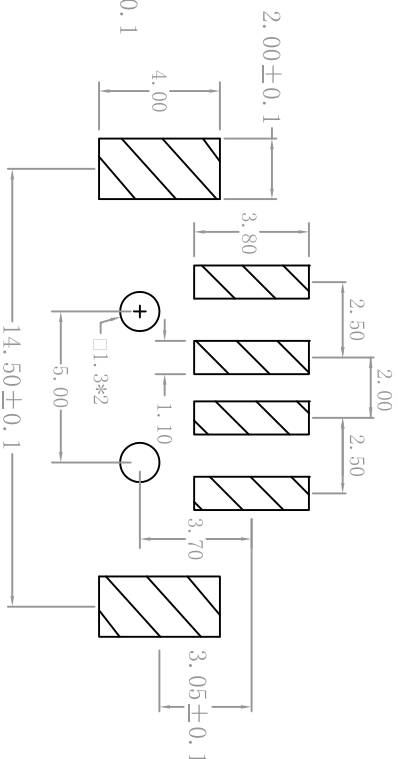
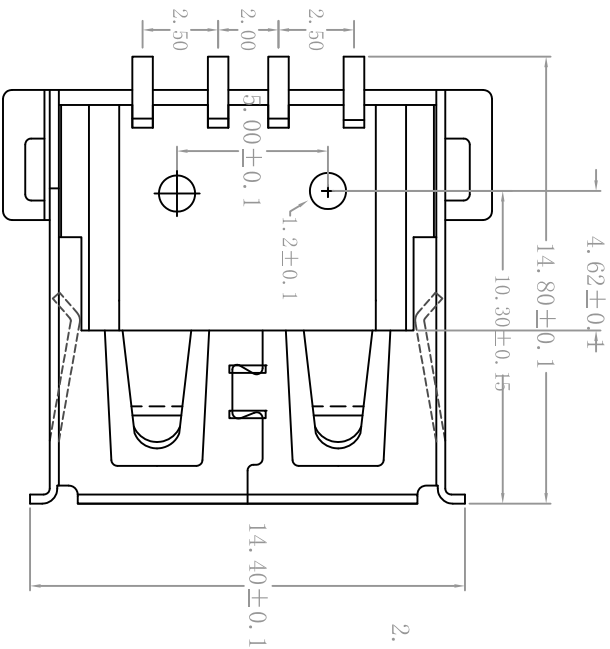
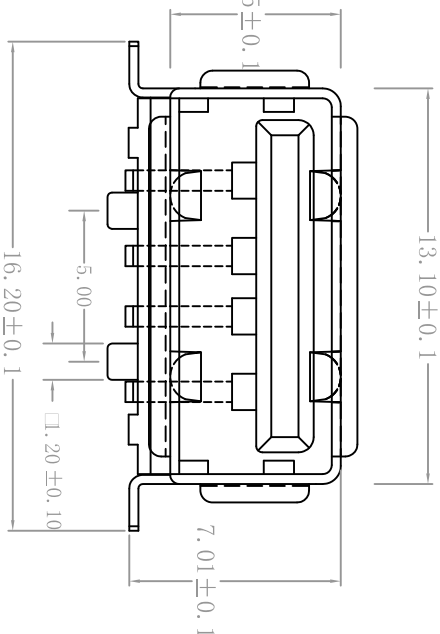


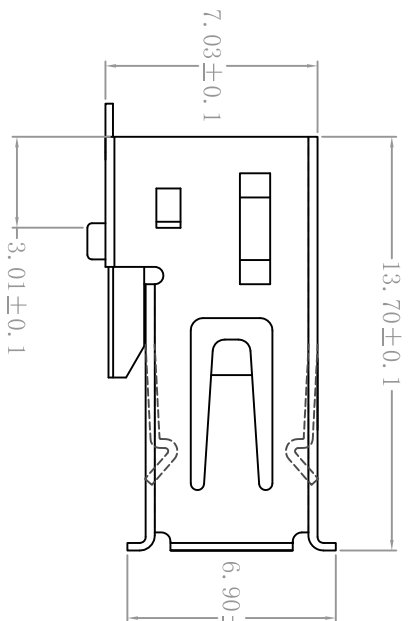

规格说明: Specifications:
电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Umate Force
Mate force: 3.75kgf (MAX)
Umate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Thermoplastics,
UL 94V-0 LCP/PBT White/Black
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
- 外壳: Shell:
Nickel Plating

深圳市鸿锐盛电子有限公司

图号 (DWG. NO)		单位 (UNIT):	MM
版本 (REV)		比例 (SCALE)	1:1
日期 (DATE)	2017.06.15	设计 (DESIGN)	严亮
料号 (PART NO)	USB A/F 全贴1.2柱白胶卷边	审核 (CHECKED)	杜江
型号 (MODEL NO)		核准 (APPROVED)	李永锋
		公差 (TOLERANCE)	未注公差 X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±5° X.X° ±2°