



版次:	修改内容:	修改日期:	签名:
A/1	版次和编号		

ELECTRICAL

Current rating:1amp
Dielectric withstanding voltage:
AC 250v min(for 1 minute)
Insulation resistance:
1000M Ω min(at 500v DC)
Contact resistance:
30m Ω max
Durabil tty:2500 cycles
Working temperature:-55° C~+105° C

MECHANICAL

Insulator material:
PBT&glass—fiber reinforced UL 94—HB
Contact: Brass
Housing color: white
Shell: nickel(ortin,gold)plated
Number of contact:04.
Durabil tty:2500 cycles

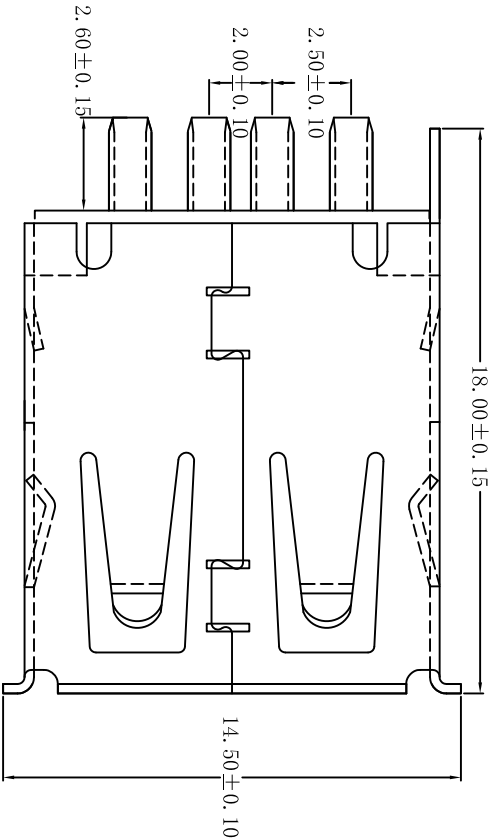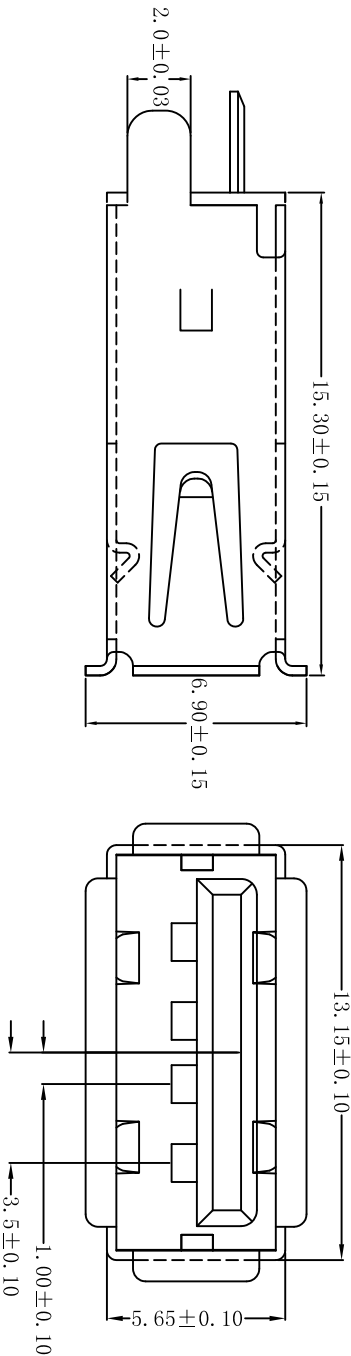

深圳市鸿锐盛电子有限公司

COMMONLY TOLERANCES		DWG NO		SCALE	1:1	APPROVE	xiangyiming
X.XXX	±0.05						
X.XX	±0.15						
X.X	±0.20						
X.	±0.25						
ANGLE	±2°	TITLE		REV	A/1	CHECKED	
3RD ANGLES		USB AF 180度 焊线 卷边		SHEET	1/1		
							