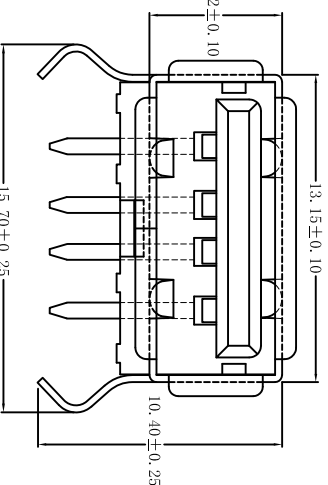
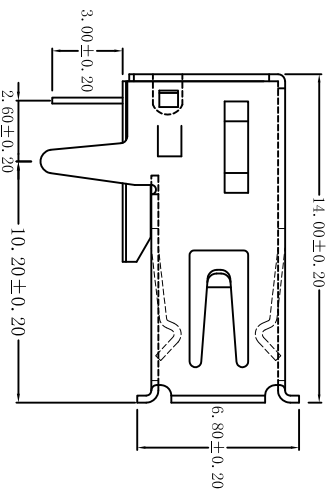
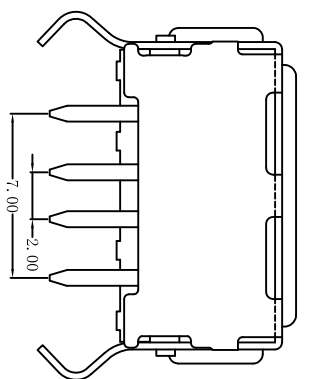
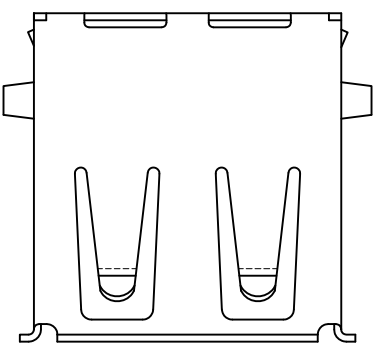


规格说明: Specifications:
电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.75kgf (MAX)
Unmate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Thermoplastics,
UL 94V-0 PP/PBT White/Black
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area
Tin On Solder Tails
- 外壳: Shell:
Nickel Plating

深圳市鸿锐盛电子有限公司
SHENZHEN HRS ELECTRONIC CO., LTD.

深圳市鸿锐盛电子有限公司 SHENZHEN HRS ELECTRONIC CO., LTD.			图号 (DWG NO)		单位 (UNIT): MM	
品名 (ITEM NO) USB AF 90度弯脚后盖卷边			版本 (REV)		比例 (SCALE) 1:1	
料号 (PART NO) USB AF 90度弯脚后盖卷边			日期 (DATE) 2017. 06. 15		⌀ — —	
型号 (MODEL NO)			设计 (DESIGN) 严亮			
核准 (APPROVED) 李永锋			审核 (CHECKED) 杜江		公差 (TOLERANCE) UNSPECIFIED	
					X.X ±0.30	
					X.XX ±0.20	
					X.XXX ±0.10	
					X° ±5°	
					X.X° ±2°	