
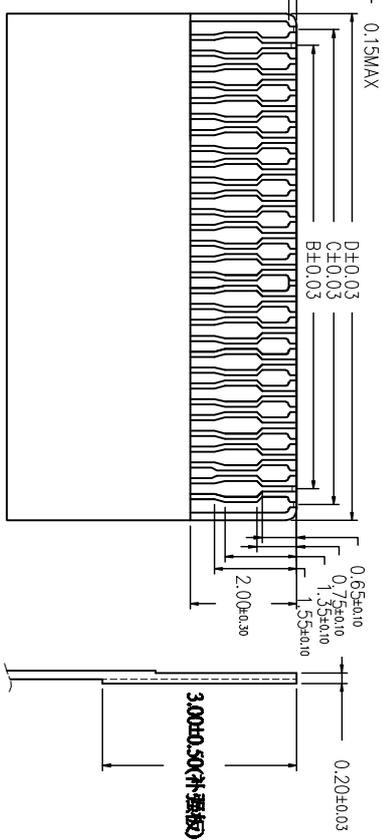


FPC/FFC Insert Direction
Recommended P.C.B Layout

Note:

1. Material
- 1.1: Housing: LCP UL94-V0 Color: Natural/Or Black
- 1.2: Actuator: LCP UL94-V0 Color: Block Or Natural
- 1.3: Contact: Phosphor Bronze.
2. Plating
- 2.1: Contact: See Part Number.

3. Rating:
- 3.1: Operating Voltage: 30V AC/DC.
- 3.2: Current Rating: 0.2A AC/DC.
- 3.3: Operating Temperature: -55°C ~ +85°C.

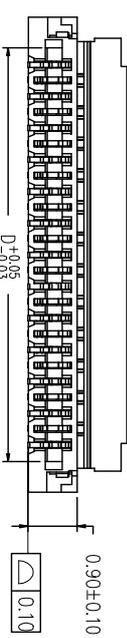

Applicable FPC

本产品符合 RoHS, SONY00259, VHF, 其他
※禁止使用本公司所禁用有毒物质

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差参考表

X.X	±0.30	X.X'	±5'
X.XX	±0.20	X.XX'	±2'
X.XXX	±0.02	X.XXX'	±1'

深圳市鸿锐盛电子有限公司

III.E: FPC 0.3Pitch 1.0H ZIF
產品名稱: 后續蓋式

APPD: 核准:
CHECK: 檢製:
DRAW: Yang

DWG NO: 0.3K-GX-nPWB
DATE: 20111102
SCALE: 1:1
UNIT: mm
PAGE: 1/1

No. of Contacts	Dimension			
	A	B	C	D
7	3.60	1.20	1.80	2.43
9	4.20	1.80	2.40	3.03
11	4.80	2.40	3.00	3.63
13	5.40	3.00	3.60	4.23
15	6.00	3.60	4.20	4.83
21	7.80	5.40	6.00	6.63
23	8.40	6.00	6.60	7.23
25	9.00	6.60	7.20	7.83
27	9.60	7.20	7.80	8.43
31	10.80	8.40	9.00	9.63
39	13.20	10.80	11.40	12.03
51	16.80	13.40	15.00	15.63
61	19.80	17.40	18.00	18.63

REV	NEW DRAWING	DESCRIPTION	ECN NO	BY	DATE
A					04/15'15