

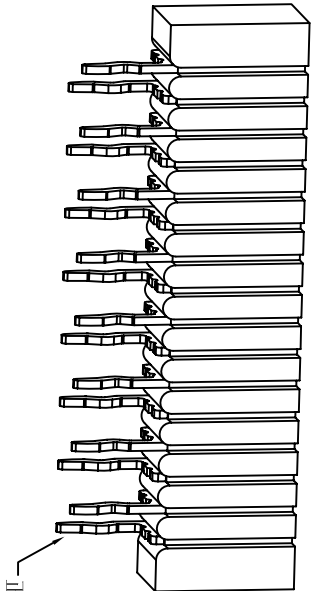

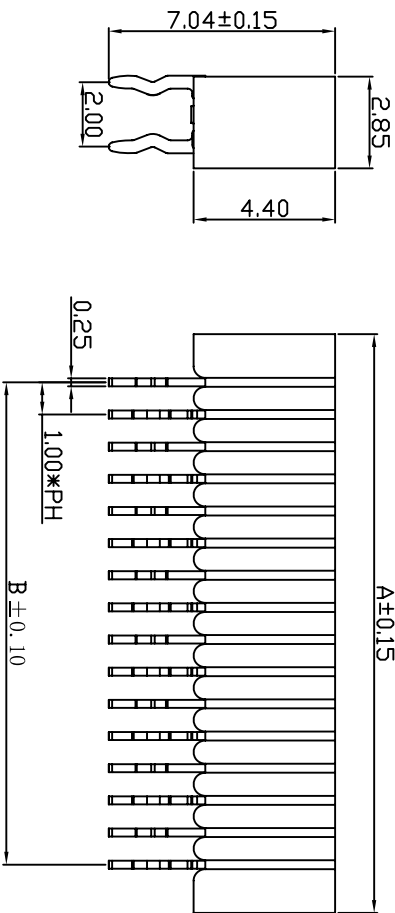
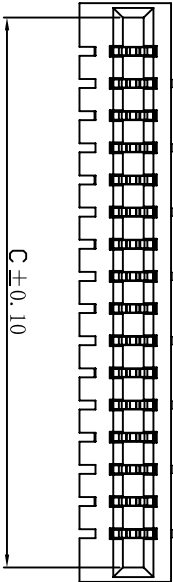


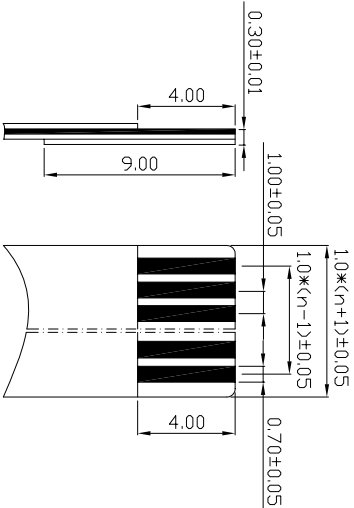


性能:
额定电流: 0.5A
额定电压: 50V
耐电压: 500V
接触电阻: 30mΩ
绝缘电阻: 800MΩ
工作温度: -20℃~+85℃
塑件(材质): LCP BLACK, UL94V-0
插簧(材质): 磷青铜, 镀锡/镀金



适用扁平电缆

孔位	A	B	C
4	6.00	3.00	5.10
5	7.00	4.00	6.10
6	8.00	5.00	7.10
7	9.00	6.00	8.10
8	10.00	7.00	9.10
9	11.00	8.00	10.10
10	12.00	9.00	11.10
11	13.00	10.00	12.10
12	14.00	11.00	13.10
13	15.00	12.00	14.10
14	16.00	13.00	15.10
15	17.00	14.00	16.10
16	18.00	15.00	17.10
17	19.00	16.00	18.10
18	20.00	17.00	19.10
19	21.00	18.00	20.10
20	22.00	19.00	21.10
21	23.00	20.00	22.10
22	24.00	21.00	23.10
23	25.00	22.00	24.10
24	26.00	23.00	25.10
25	27.00	24.00	26.10
26	28.00	25.00	27.10
27	29.00	26.00	28.10
28	30.00	27.00	29.10
29	31.00	28.00	30.10
30	32.00	29.00	31.10
31	33.00	30.00	32.10
32	34.00	31.00	33.10
33	35.00	32.00	34.10
34	36.00	33.00	35.10
35	37.00	34.00	36.10

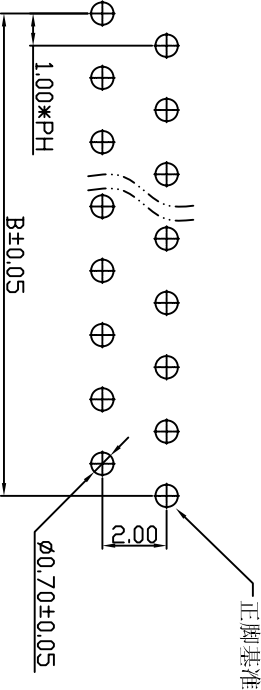

PCB LAYOUT

NAME (INTENDED USE)		UNITS		NAME (INTENDED USE)	
K. ± 0.3		K.° ± 5°		mm	
.X ± 0.25		.X° ± 2°		MAT'L	
.XX ± 0.20		.XX° ± 1°		FINISH	
.XXX ± 0.10		.XXX° ± 0.5°		Q'TY	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		PART NO. (INTENDED USE)		CHKD:	
		1. 0-B-nP		APPR:	
		TITLE:		DR:huang sheng 2013/03/29	
		1. 0mm FPC(双面接) 直针		DMG NO.:	
		SCALE		SHEET	
		1/1		1/1	
		REV.		A	