

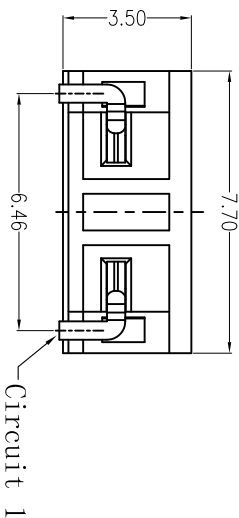
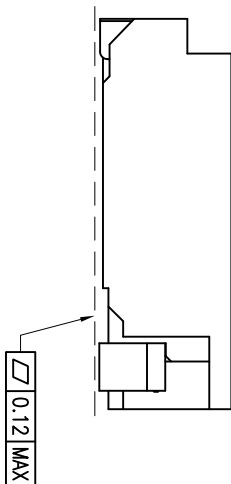


REV	DESCRIPTION	DESIGN	DATE
REV-1	RELEASE-1	DESIGN-1	DATE-1
REV-2	RELEASE-2	DESIGN-2	DATE-2

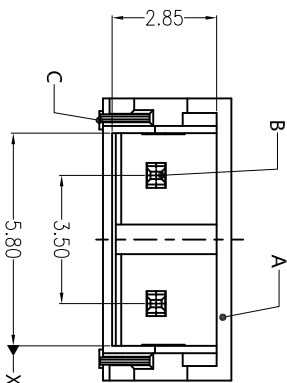

主要技术参数 Main Specifications

线数 (Poles): 02
接触电阻 (Contact resistance): $\leq 20m\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
额定电压 (Rated voltage): 1400V AC DC
额定电流 (Rated current): 1.0A AC DC
耐压 (Withstand Voltage): 3800V AC/minute
温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$

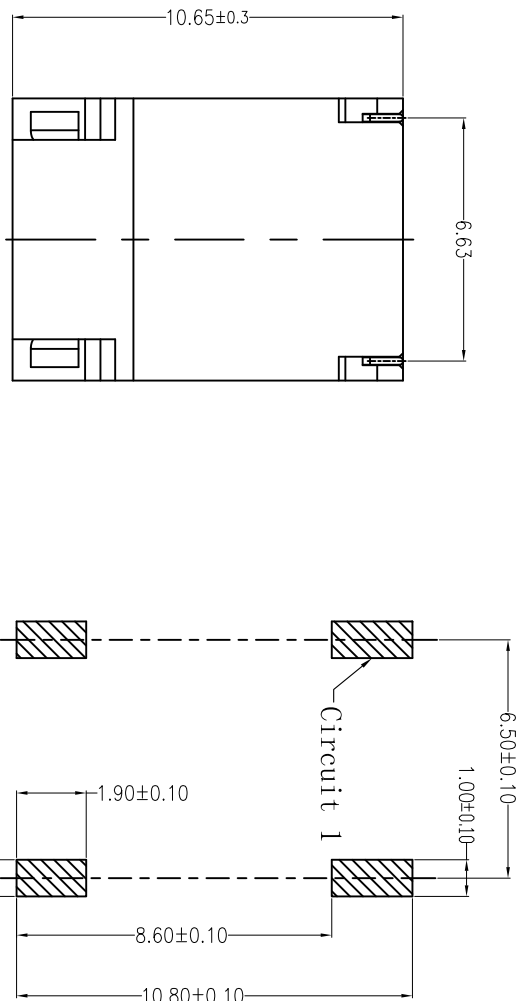

SUGGESTED PCB LAYOUT (COMPONENT SIDE)

C	SOLDER TAB	2 PCS	PhosphorBronze	Sn-plated
B	CONTACT	2 PCS	PhosphorBronze	Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR: BEIGE
ITEM	COMPONENT	QTY	MATERIAL	FINISH
深圳市鸿锐盛电子有限公司				
TITLE: 3.5mm SMT 高压插座				
X.±0.5	X.±5°	USE: CUSTOMER		PART NO.: 3.5-2P
X.±0.3	X.±2°	APPD:		DWG NO.:
.XX±0.25	.XX±1°	CHKD:		SCALE
—	—	DR:		SHEET
				

深圳市鸿锐盛电子有限公司