

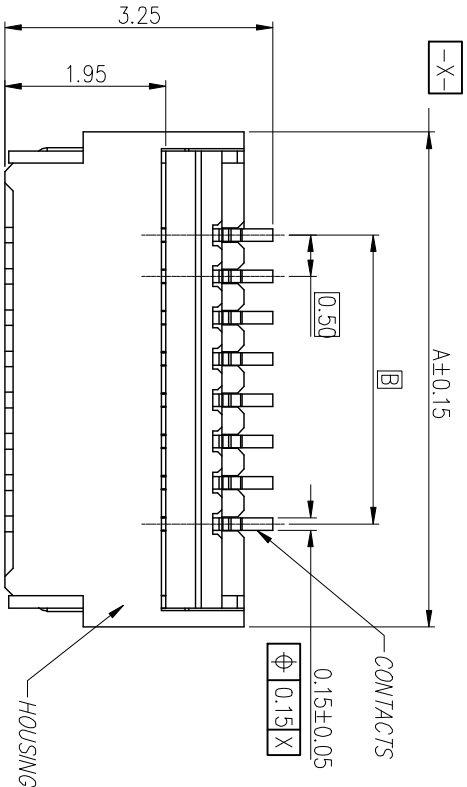


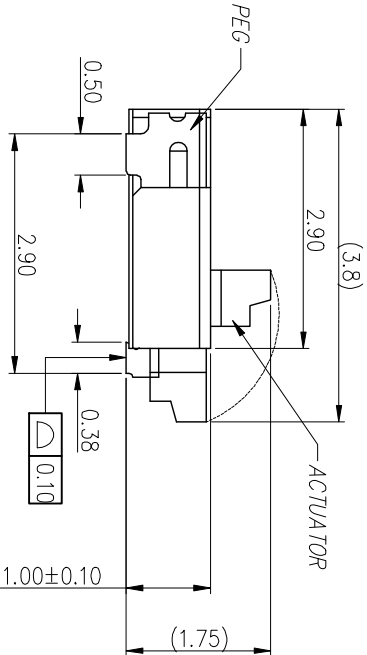

NOTE:
1. MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC(UL94V-0), COLOR: NATURAL.
CONTACTS: COPPER ALLOY.
PEG: COPPER ALLOY.
ACTUATOR: HIGH TEMPERATURE THERMOPLASTIC(UL94-V0).
2. RATING:
OPERATING VOLTAGE: 50Vrms AC.
CURRENT RATING: 0.5A.
OPERATING TEMPERATURE: -55°C~+85°C.
OPERATING HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)
STORAGE TEMPERATURE RANGE: -10°C~+50°C.
STORAGE HUMIDITY RANGE: RELATIVE HUMIDITY 90% MAX.(NO CONDENSATION)

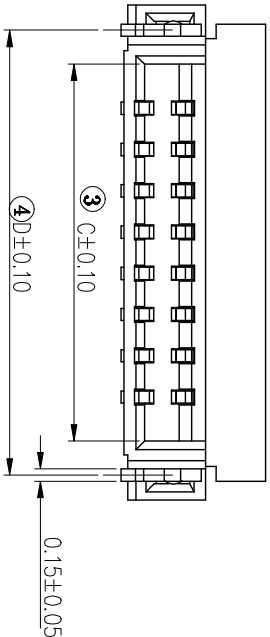

本产品符合 RoHS 符合 SONY00259 其他
※禁止使用本公司所禁用有害物质

A	NEW DRAWING				
REV	DESCRIPTION	ECN.NO	BY	DATE	
			LIU	02/27'13	

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参考表				深圳市鸿锐电子有限公司					
X.X	:±0.30	X.X'	:±5'	APPD:	校核:	DWG. NO:	TITLE:	FPC 0.5Pitch 1.0H ZIF	
X.XX	:±0.20	X.XX'	:±2'	CHECK:	校對:	產品料號:	R/A Connector		
X.XXX:±0.10	X.XXX'	:±1'	繪圖:	DRAW:	LIUPENG	DATE	SCALE	UNIT	PAGE
						20111209	1:1	mm	1/2