

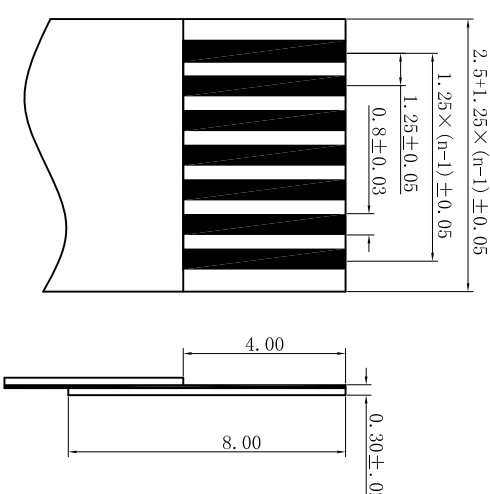
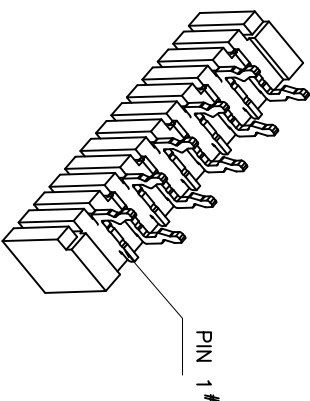
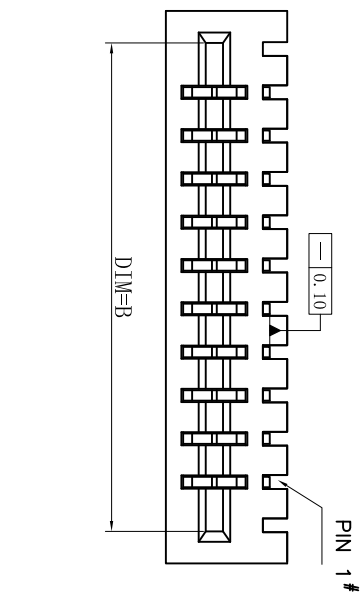
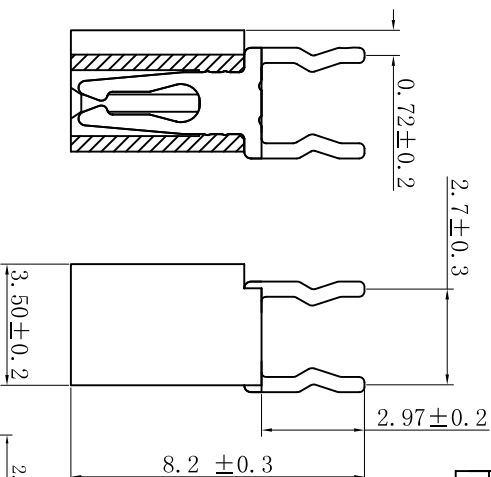


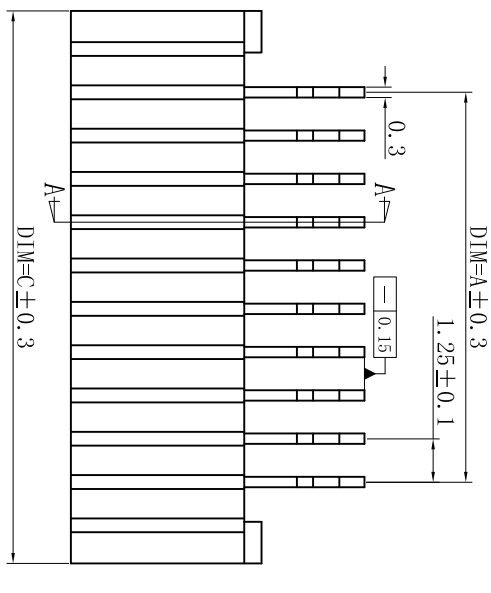


Electrical

Voltage: 50 V AC(rms)/DC
Current: 1.0 A AC(rms)/DC
Contact Resistance: 40 mΩ max(initial)
Dielectric Withstanding Voltage: 200 V AC/rms
Insulation Resistance: 800 MΩ min
Operating Temp: -40° C +85° C

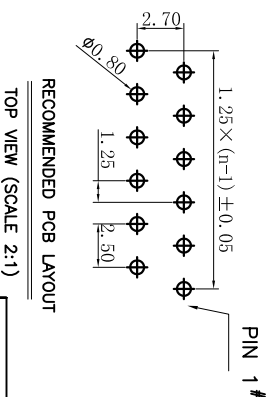

RECOMMENDED PCB LAYOUT
TOP VIEW (SCALE 2:1)

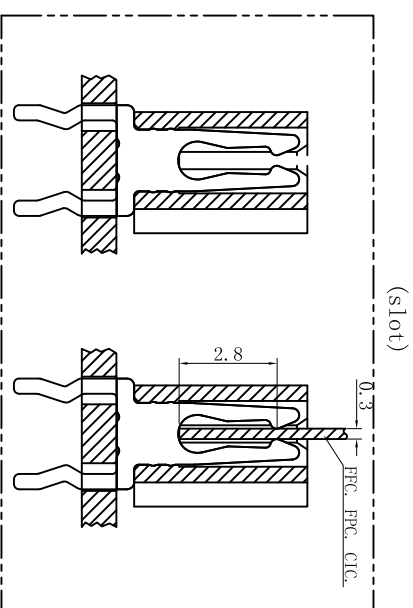

序号	DIM=A	DIM=B	DIM=C
004	3.75	6.35	8.45
005	5.00	7.60	9.70
006	6.25	8.85	10.95
007	7.50	10.10	12.20
008	8.75	11.35	13.45
009	10.00	12.60	14.70
010	11.25	13.85	15.95
011	12.50	15.10	17.20
012	13.75	16.35	18.45
013	15.00	17.60	19.70
014	16.25	18.85	20.95
015	17.50	20.10	22.20
016	18.75	21.35	23.45
017	20.00	22.60	24.70
018	21.25	23.85	25.95
019	22.50	25.10	27.20
020	23.75	26.35	28.45
021	25.00	27.60	29.70
022	26.25	28.85	30.95
023	27.50	30.10	32.20
024	28.75	31.35	33.45
025	30.00	32.60	34.70
026	31.25	33.85	35.95
027	32.50	35.10	37.20
028	33.75	36.35	38.45
029	35.00	37.60	39.70
030	36.25	38.85	40.95
031	37.50	40.10	42.20
032	38.75	41.35	43.45
033	40.00	42.60	44.70

深圳市鸿锐盛电子有限公司

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN.	FILE NAME.	PART NUMBER.	MDRAWING NO.	REV. B
X. ±0.30 .X ±0.25 .XX ±0.15 .XXX ±0.10	X°. ±5.0° .X° ±3.0° .XX° ±2.0°	设计 CHECKED. 审核 APPROVED. 核准	品名 1.25直针双面接-焊脚正脚	料号 1.25-E-nP	图号 1031A001	